

WPW/D DOSING SCALES



Dosing scales are equipped with measuring indicator PUE C41H and weighing platform. Dosing system is connected with external automatic system, equipped with steering and performing devices. These devices enable automatic, semi-automatic and manual dosing of liquids and loose materials. Moreover the system enables preparation of mixtures from gathered components (dosing exits). Ingredients have assigned nominal masses, which are measured by the system during dosing process.

Dosing system options:

- possibility to rescale masses of formula ingredients (multiplier of formula mass).
- Possibility to set particular ingredients tare mode during dosing or formula making time.
- Possibility to set the way of ingredient's mass acceptance after weighing (manual or automatic)
- Possibility to declare of cycle numbers for specific formula,
- Possibility to stop the formula or dosing process at each stage of advance
- Possibility to work with external buttons: TARA, ZERO, PRINT, START, STOP, (START/STOP) CHUTE and free configuration of inputs assigned to the button,
- Free configuration possibility of output numbers for the following functions; MIN, OK., MAX, STABIL, CHUTE P1, CHUTE P2, WORK,
- Printout from formula and dosing process
- Program is equipped with standard printout form for reports, which consists of following information: date and time of the report, operator's name, formula's name, formula's code, formula's mass, mode, formula's status, assortment's name, assortment's ID, assortment's mass, assortment's setting, assortment's deviation,
- Access to operator's, assortment's formula's, weighing's, universal variables, and tare databases.



Counting pieces



Checkweighing



Summing function



Filling



Animal weighing



Percentage






Statistics



Caps lock of max indication



Measurement in Newton

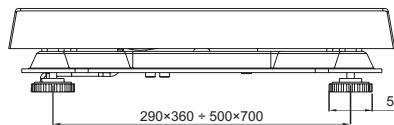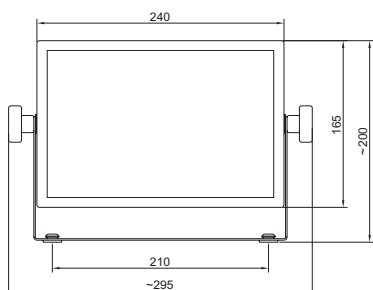

Technical data:

	WPW/D 6 C1/K	WPW/D 15 C1/K	WPW/D 30 C1/K	WPW/D 60 C2/K	WPW/D 150 C2/K	WPW/D 300 C2/K	WPW/D 150 C3/K	WPW/D 300 C3/K
Max capacity	6 kg	15 kg	30 kg	60 kg	150 kg	300 kg	150 kg	300 kg
Readability	2 g	5 g	10 g	20 g	50 g	100 g	50 g	100 g
Tare range	-6 kg	-15 kg	-30 kg	-60 kg	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	290×360 mm	290×360 mm	290×360 mm	400×500 mm	400×500 mm	400×500 mm	500×700 mm	500×700 mm
Working temperature	-10° - +40 °C							
Output signal	RS 232, RS 485							
IP rating	IP 67							
Power supply	230V AC, 50Hz							
Display	LCD							