

## 4 LOAD CELL STAINLESS STEEL SCALE



Measurement with application of 4 load cells is a guarantee of precise readout, regardless of load positioning on the weighing platform.

WPT/4HZ scales are manufactured in fully stainless steel technology and they are offered in pit version. They feature an open weighing platform (for easy cleaning the area under the platform).

Stainless steel indicator PUE C/31H with backlit LCD display is installed on 3 meter long cable with possibility of mounting on wall. WPT/4HZ scale is offered with capacity from 300 kg / 100 g to 6000 kg / 2000g.

The scale is powered from mains, RS 232 output is offered as standard.



Counting pieces



Checkweighing



Summing function

### Technical data:

	WPT/4 300 H6/Z	WPT/4 600 H6/Z	WPT/4 300 H7/Z	WPT/4 600 H7/Z	WPT/4 1500 H7/Z	WPT/4 1500 H8/Z	WPT/4 3000 H8/Z
Max capacity	300 kg	600 kg	300 kg	600 kg	1500 kg	1500 kg	3000 kg
Readability	100 g	200 g	100 g	200 g	500 g	500 g	1000 g
Tare range	-300 kg	-600 kg	-300 kg	-600 kg	-1500 kg	-1500 kg	-3000 kg
Pan size	800×800 mm	800×800 mm	1000×1000 mm	1000×1000 mm	1000×1000 mm	1200×1200 mm	1200×1200 mm
Working temperature	-10° - +40 °C						
Output signal	RS 232						
IP rating	IP 68 construction, IP 66/67 indicator						
Power supply	230V / 11V AC or 120V / 11V AC and internal accumulator						
Operation time on accumulators	~45 h (average)						
Display	LCD (backlit)						
Scale weight with indicator	75 kg	75 kg	105 kg	105 kg	115 kg	145 kg	155 kg
Platform height	88 mm	88 mm	88 mm	88 mm	88 mm	88 mm	111 mm

### Technical data:

	WPT/4 1500 H8/9/Z	WPT/4 3000 H8/9/Z	WPT/4 1500 H9/Z	WPT/4 3000 H9/Z	WPT/4 3000 H10/Z	WPT/4 6000 H10/Z
Max capacity	1500 kg	3000 kg	1500 kg	3000 kg	3000 kg	6000 kg
Readability	500 g	1000 g	500 g	1000 g	1000 g	2000 g
Tare range	-1500 kg	-3000 kg	-1500 kg	-3000 kg	-3000 kg	-6000 kg
Pan size	1200×1500 mm	1200×1500 mm	1500×1500 mm	1500×1500 mm	1500×2000 mm	1500×2000 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
IP rating	IP 68 construction, IP 66/67 indicator					
Power supply	230V / 11V AC or 120V / 11V AC and internal accumulator					
Operation time on accumulators	~45 h (average)					
Display	LCD (backlit)					
Scale weight with indicator	178 kg	195 kg	210 kg	230 kg	320 kg	325 kg
Platform height	88 mm	111 mm	88 mm	111 mm	111 mm	166 mm

## Technical data:


	WPT/4 300/600 H6/Z	WPT/4 300/600 H7/Z	WPT/4 600/1500 H7/Z	WPT/4 600/1500 H8/Z	WPT/4 1500/3000 H8/Z
Max capacity	300/600 kg	300/600 kg	600/1500 kg	600/1500 kg	1500/3000 kg
Readability	100/200 g	100/200 g	200/500 g	200/500 g	500/1000 g
Tare range	-600 kg	-600 kg	-1500 kg	-1500 kg	-3000 kg
Pan size	800x800 mm	1000x1000 mm	1000x1000 mm	1200x1200 mm	1200x1200 mm
Working temperature	-10° - +40 °C				
Output signal	RS 232				
IP rating	IP 68 construction, IP 66/67 indicator				
Power supply	230V / 11V AC or 120V / 11V AC and internal accumulator				
Operation time on accumulators	~45 h (average)				
Display	LCD (backlit)				
Scale weight with indicator	75 kg	105 kg	115 kg	145 kg	155 kg
Platform height	88 mm	88 mm	88 mm	88 mm	111 mm

## Technical data:

	WPT/4 600/1500 H8/9/Z	WPT/4 1500/3000 H8/9/Z	WPT/4 600/1500 H9/Z	WPT/4 1500/3000 H9/Z	WPT/4 1500/3000 H10/Z	WPT/4 3000/6000 H10/Z
Max capacity	600/1500 kg	1500/3000 kg	600/1500 kg	1500/3000 kg	1500/3000 kg	3000/6000 kg
Readability	200/500 g	500/1000 g	200/500 g	500/1000 g	500/1000 g	1000/2000 g
Tare range	-1500 kg	-3000 kg	-1500 kg	-3000 kg	-3000 kg	-6000 kg
Pan size	1200x1500 mm	1200x1500 mm	1500x1500 mm	1500x1500 mm	1500x2000 mm	1500x2000 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
IP rating	IP 68 construction, IP 66/67 indicator					
Power supply	230V / 11V AC or 120V / 11V AC and internal accumulator					
Operation time on accumulators	~45 h (average)					
Display	LCD (backlit)					
Scale weight with indicator	178 kg	195 kg	210 kg	230 kg	320 kg	325 kg
Platform height	88 mm	111 mm	88 mm	111 mm	111 mm	166 mm

## Additional equipment:

Kafka thermal printer	PW-WIN 2004 computer software
Epson impact printer	RAD-KEY 2000 computer software
Anti-dust case for Epson printer	REC-FS 2000 computer software
Handle for measuring indicator	RS 232 cable: scale - thermal printer: P0136
KR-04 converter RS 232 / Ethernet	RS 232 cable: scale - "Epson/Citizen" printer: P0151
Power loop output AP2	RS 232 cable: scale - computer: P0108
Large LCD display (digit height 4,5")	LCD display in stainless steel casing

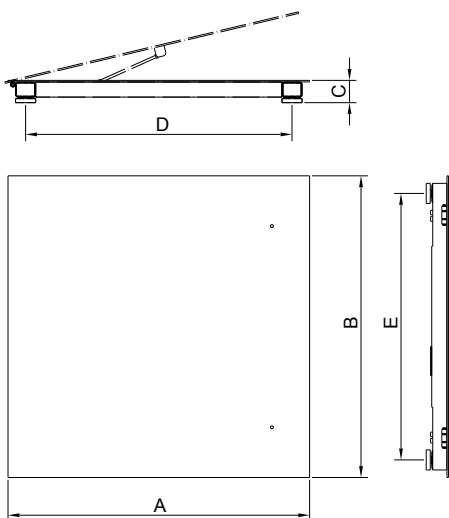

	max	AxB	C	DxE
WPT/4 300 H6	300kg	800x800mm	88±2mm	660x660mm
WPT/4 600 H6	600kg	800x800mm	88±2mm	660x660mm
WPT/4 300 H7	300kg	1000x1000mm	88±2mm	860x860mm
WPT/4 600 H7	600kg	1000x1000mm	88±2mm	860x860mm
WPT/4 1500 H7	1500kg	1000x1000mm	88±2mm	860x860mm
WPT/4 1500 H8	1500kg	1200x1200mm	88±2mm	1060x1060mm
WPT/4 3000 H8	3000kg	1200x1200mm	111mm	1060x1060mm
WPT/4 1500 H8/9	1500kg	1200x1500mm	88±2mm	1060x1360mm
WPT/4 3000 H8/9	3000kg	1200x1500mm	111mm	1060x1360mm
WPT/4 1500 H9	1500kg	1500x1500mm	88±2mm	1360x1360mm
WPT/4 3000 H9	3000kg	1500x1500mm	111mm	1360x1360mm
WPT/4 3000 H10	3000kg	1500x2000mm	111mm	1360x1860mm

## PARTNER CORPORATION

Str. Mures nr.63,Bucuresti ,Sector 1 \* Tel/fax : 021-2242257 \* e-mail:office@partner.com.ro \* www.partner.com.ro